

AcquaSaver®



Top of Tank Assembly

- ✓ Hydraulically Operated
- ✓ Solid Brass Construction
- ✓ Built-in Dual Check Valves




 [acquasaver.com.au](https://www.acquasaver.com.au)



AcquaSaver®

The AcquaSaver Valve is a fully automatic mechanical rainwater/mains changeover device designed for submersible pressure pump system for harvesting rainwater for the toilet, laundry and household applications with automatic mains water backup.

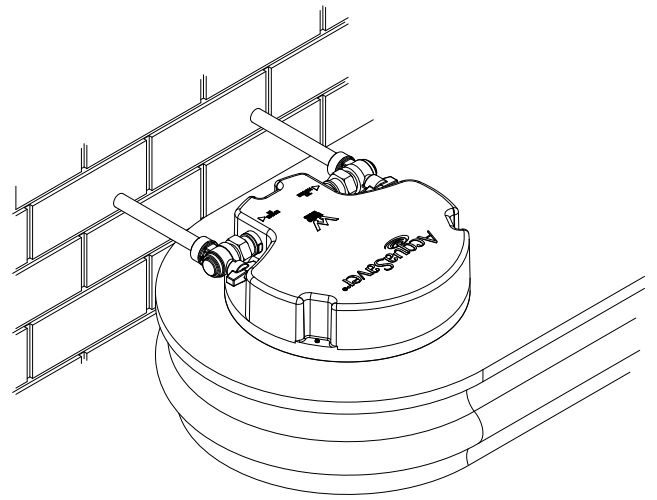

Features


- ✓ Patent design
- ✓ Easy to install
- ✓ Watermark Approved
- ✓ 2 year warranty
- ✓ Does not require regular maintenance
- ✓ No electrical consumption
- ✓ No electrical components
- ✓ Solid brass construction
- ✓ Fully waterproof - Built to last
- ✓ Built-in certified dual check valve for backflow prevention
- ✓ Watermark Approved right angle ball valves

Specifications


Max Mains Pressure	500 KPa recommended
Max Pump Pressure	600 KPa
Min Pump Pressure	300 KPa Recommended
Max Flow Rate	50 LPM
Max water temperature	40° C
Min Water Temperature	0° C*
Pump Inlet	25mm 1" BSP F
Mains Water Inlet	20mm 3/4" BSP
Outlet	20mm 3/4" BSP
Weight	2.5 Kg

*Ensure proper protection against freezing weather.

Flow vs. Pressure curve – Mains Inlet

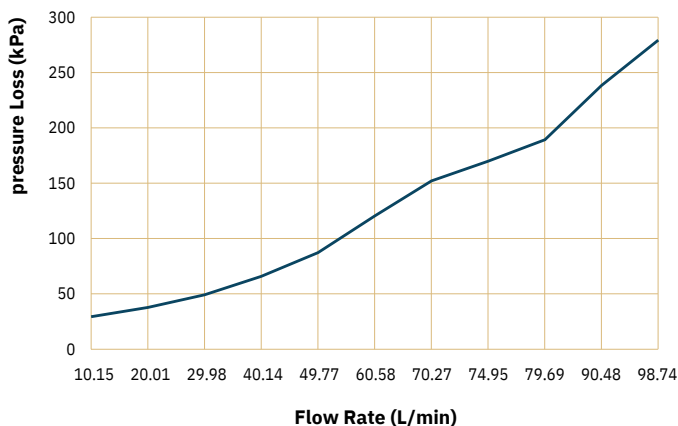

Flow vs. Pressure curve – Pump Inlet

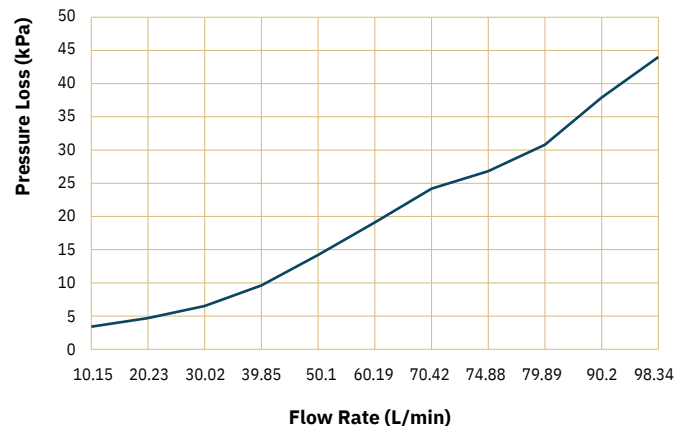

Proudly manufactured by



4 Squires Way, Croydon South
Victoria 3136 Australia

☎ +61 3 9878 1575
☎ +61 3 9894 2820

🌐 acquasaver.com.au

Available from: